

541,835

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 July 2004 (29.07.2004)


PCT

(10) International Publication Number  
**WO 2004/063525 A1**

- (51) International Patent Classification<sup>7</sup>: **E21B 29/00**, 43/112, 44/04
- (74) Agent: **HAMSO PATENTBYRA ANS**; P.O. Box 171, N-4302 Sandnes (NO).
- (21) International Application Number: **PCT/NO2004/000005**
- (22) International Filing Date: 13 January 2004 (13.01.2004)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:  
20030149 13 January 2003 (13.01.2003) FI
- (71) Applicant (for all designated States except US): **NORSE CUTTING AND ABANDONMENT AS** [NO/NO]; Hamrasletta 11, N-4056 Tananger (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **JOHANNESSEN, Tor, H.** [NO/NO]; Karistø 50, N-4046 Hafslsfjord (NO).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: A METHOD AND DEVICE FOR DRILLING INTO TUBULARS LOCATED WITHIN ONE ANOTHER

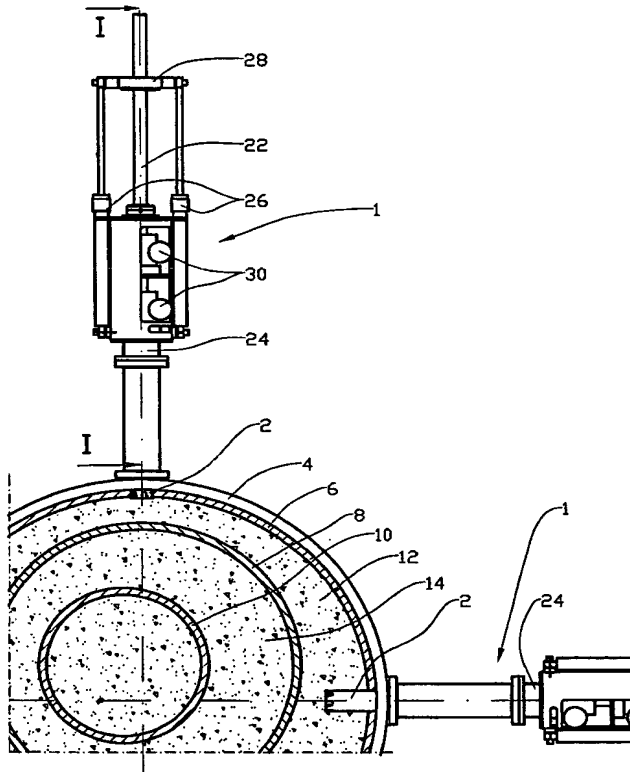

(57) Abstract: Method and device to increase the feed speed of a drill bit (2) and its associated drilling device (1) when drilling through tubulars (6, 8, 10) located within one another where in the annuli (12, 14) created between the tubulars (6, 8, 10) there is located a material or a fluid which in comparison to the pipe wall material is easier to drill, and where the feed speed of the drill bit (2) is controlled by a pressure fluid regulating valve (52) which preferably is located close to the drilling device (1), and where there during the progress of the drill bit (2) through the annulus (12, 14) is opened for an influx of pressure fluid in parallel with the pressure fluid regulating valve (52).

WO 2004/063525 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*